




CABLES ESPECIALES / SPECIAL ROPES

CABLES DE ACERO FORESTALES / FORESTRY ROPES

SUAJADO / SWAGED 619/625/626/631

Construcción 6xK19S+(7x7+0) Seale - Swaged
 Construction 6xK25Fi+(7x7+0) Filler – Swaged
 6xK26WS+(7x7+0) Warrington seale -Swaged
 6xK31WS+(7x7+0) Warrington seale- Swaged

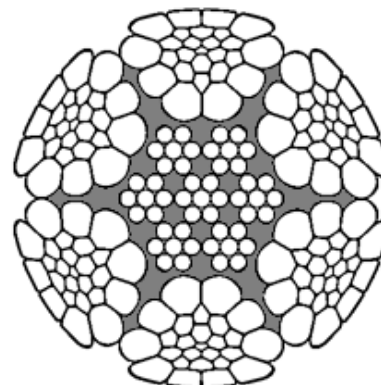

EN 12385-4:2003+A1:2008

Aplicaciones / Application:



Diámetro nominal	Peso aprox.	Sección metálica	Carga de rotura mínima Minimum breaking load	
Nominal diameter	Weight	Metallic cross section	1960 N/mm ² . / 200 Kg/mm ² .	
mm.	Kg/m	mm ² .	kN	Kp.
8	0,37	42,3	67,2	6.852
9	0,44	51,4	81,9	8.351
10	0,53	60,8	97,9	9.983
11	0,63	74,0	117	11.930
12	0,73	85,5	136	13.868
13	0,84	97,4	156	15.907
14	0,98	118	179	18.252
15	1,09	130	204	20.802
16	1,30	152	236	24.065
17	1,48	171	261	26.615
18	1,68	195	297	30.285
19	1,84	213	325	33.140
20	2,07	240	359	36.608
22	2,46	286	436	44.460
24	2,89	336	502	51.190

* Diámetros adicionales y composiciones especiales bajo pedido.